

CALIPB-1AI36-10(P) CALIPB-1AI60-10(P)

www.black.honeywell.com

1.3 Megapixel High Definition TDN IR Weather-Proof IP Bullet Camera

High Performance IP Camera at an Economical Price

Available in 3.6mm / 6mm built-in lens, Honeywell Black™ CALIPB-1AI36/60-10(P) is a weather-proof IP camera designed for small surveillance application which required high definition image quality at a very economical price. Equipped with 1.3 Megapixel (1280H x 960V) sensor, the CALIPB-1AI36/60-10(P) delivers 720P high resolution image at up to 30fps real time.

Advanced Features

Featuring True Day / Night with IR-cut filter and built-in IR led, the camera can automatically switch to black and white in pitch black conditions and also gives an IR beam distance of up to 20 meters, providing superior images at both day and night time. IP66 rating weatherproof housing guarantees outstanding outdoor surveillance applications.

By applying the H.264 video compression technology, the CALIPB-1AI36/60-10(P) streams high quality images at optimized bandwidth to significantly reduce data volume and save storage space. It also supports the ONVIF specifications for high interoperability among network video products.

The CALIPB-1AI36/60-10(P) comes with a free CMS software CAL-CMS200 which provides rich functions such as video management, user management, storage, video output, etc. It's also compatible with Honeywell Black™ CALNVR series to develop a high performance system.

Market Opportunities

Available in 3.6mm / 6mm fixed lens, Honeywell Black™ CALIPB-1AI36/60-10(P) is designed for small surveillance application at a very budget-friendly price. Featuring 1.3 Megapixel (1280H x 960V) sensor, 720P high resolution image, TDN function, H.264 video compression, up to 20 meters IR night vision and optional PoE function, Honeywell Black™ CALIPB-1AI36/60-10(P) is ideal for hotels, chain stores, commercial offices, hospitals, residential areas, warehouses, and education facilities and so on.

FEATURES

- 1.3 Megapixel (1280H x 960V), 720P HD resolution
- 1/3" ultra-low illumination CMOS
- High-profile H.264 compression, support dual-stream
- 720p real-time video output
- Built-in 6.0 / 3.6mm fixed Lens
- True Day / Night with automatic removable IR cut filter, AGC, BLC, DWDR
- Built-in IR LED, 10m~20m IR beam distance
- Minimum illumination: Color: 0.01Lux, Black / White: 0.0 Lux (IR On)
- Motion detection, Privacy masking, Mirror, Flip, Anti-flicker
- IP66 weather-proof
- Power: DC12V or PoE (CALIPB-1AI36-10P / CALIPB-1AI60-10P only)
- ONVIF Compliant
- Free CAL-CMS200 central management software compatible
- CALNVRView: free Android and Apple app give you full access to your surveillance system anytime, anywhere



CALIPB-1AI36-10(P) CALIPB-1AI60-10(P)

www.black.honeywell.com

1.3 Megapixel High Definition TDN IR Weather-Proof IP Bullet Camera

SPECIFICATIONS

Model	CALIPB-1AI36-10 / CALIPB-1AI60-10	CALIPB-1AI36-10P / CALIPB-1AI60-10P
Image Sensor	1/3" ultra-low illumination CMOS	
Effective Pixels	1280 (H) x 960 (V)	
Minimum Illumination	Color: 0.01Lux @ (F1.2, AGC ON) B/W: 0.0Lux (IR On)	
Shutter Speed	Auto, 1/50 (1/60) sec, 1/120 sec, 1/250 sec, 1/500 sec, 1/1000 sec, 1/2000 sec, 1/4000 sec, 1/10,000s (millisecond adjustable)	
Lens	CALIPB-1AI36-10 / CALIPB-1AI36-10P: f=3.6mm CALIPB-1AI60-10 / CALIPB-1AI60-10P: f=6mm	
DWDR	ON/OFF	
Day & Night	True Day & Night (IR-CUT removable)	
Day & Night mode	Auto, Color, Black & White	
IR Beam Distance	10~20m	
BLC	ON/OFF	
Auto Gain Control	ON/OFF 0~100 adjustable	
Slow Shutter	None, Low, Medium, High	
NT Level (DNR)	Day / Night 0~5 adjustable	
Image Set	Brightness, Contrast, Saturation, Hue can be customized through CMS client and IE browser	
OSD Display	Time title, Channel title	
Video Compression	H.264 High Profile dual-stream	
Image Resolution & Frame Rate	Main Stream: 50Hz: 25fps (720P: 1600 x 720), (1.3M: 1600 x 960) 60Hz: 30fps (720P: 1600 x 720), (1.3M: 1600 x 960) Sub-Stream: 50Hz: 25fps (D1: 704 x 576), (CIF: 352 x 608) 60Hz: 30fps (D1: 704 x 576), (CIF: 352 x 608)	
Bite Rate	H.264: 100K~6Mbps , Image resolution lowest / lower / general / high / higher / highest selectable	
Bite Rate Type	CBR / VBR	
Audio Compression	G.711a	
Network Interface Protocol	ONVIF 2.0	
Support Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP (HTTPS, SIP, 802.1x, IPv6)	
Browser	IE 6.0 to IE 11.0	
Alarm Trigger	Video motion, video blind, video loss, intelligent analysis (line crossing), device disconnect	
Motion Detection	396 zones	
Privacy Masking (Region Cover)	4 zones	
Max. User Access	5 users	
Ethernet	1 RJ45 10 / 100Mbps self-adaptive Ethernet interface	
Audio interface	1CH 3.5mm audio input	
Storage	Network storage	
CMS	CAL-CMS200	
Mobile View APP	CALNVRView for iPhone, iPad, Android	
Operating Temperature	-10°C~60°C	
Operating Humidity	Less than 90% (non-condensing)	
Power Supply	DC12V±10%	
Power Consumption	3W Max (excluding external loading)	
PoE	N/A	IEEE 802.3af
Dimension	Φ64.5mm x 148mm	
Weight	445g	
IP Protection	IP66	
Certificate	CE, FCC, C-tick	


Note: Honeywell reserves the right, without notification, to make changes in product design or specifications.

CALIPB-1AI36-10(P) CALIPB-1AI60-10(P)

www.black.honeywell.com

1.3 Megapixel High Definition TDN IR Weather-Proof IP Bullet Camera

DIMENSION

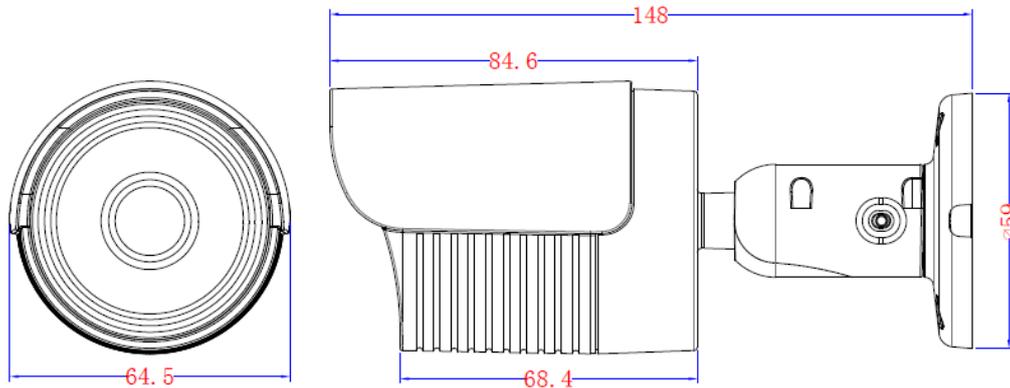

ORDERING

CALIPB-1AI36-10	Weather-proof IR Bullet Camera, 1.3 Megapixel, 1/3" ultra low illumination CMOS, 720P 30fps, 10~20 IR beam distance, TDN, 3.6mm fixed lens, IP66, 12VDC, ONVIF
CALIPB-1AI60-10	Weather-proof IR Bullet Camera, 1.3 Megapixel, 1/3" ultra low illumination CMOS, 720P 30fps, 10~20 IR beam distance, TDN, 6mm fixed lens, IP66, 12VDC, ONVIF
CALIPB-1AI36-10P	Weather-proof IR Bullet Camera, 1.3 Megapixel, 1/3" ultra low illumination CMOS, 720P 30fps, 10~20 IR beam distance, TDN, 3.6mm fixed lens, IP66, 12VDC, PoE, ONVIF
CALIPB-1AI60-10P	Weather-proof IR Bullet Camera, 1.3 Megapixel, 1/3" ultra low illumination CMOS, 720P 30fps, 10~20 IR beam distance, TDN, 6mm fixed lens, IP66, 12VDC, PoE, ONVIF

For more information:

Security East Asia
Security Pacific
Security India
Security Middle East & N.Africa
Security Russia
Security China
Security Korea

Tel: (852) 2405 2323
Tel: 1300 234 234
Tel: (91) 124 4975000
Tel: (971) 4454 1704
Tel: (7) 495 7979371
Tel: (86) 400 8800 330
Tel: (82) 2799 6114

www.black.honeywell.com
security.black@honeywell.com

Honeywell Security Group
Automation & Control Solutions
Honeywell International Inc.
www.security.honeywell.com



Sep 2014
© 2014 Honeywell International Inc.