

DVR-224/232Q-K2 SERIES TURBO HD DVR



Features and Functions

Video Input and Transmission

- Self-adaptive HDTV/HDCVI/AHD/CVBS signal input
- Up to 26/34-ch 4 MP IP cameras input for DVR-224/232Q-K2
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTV signal

Compression and Recording

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 4 MP lite resolution
- Supports real-time 1080p lite. When 1080p lite is on, the image effect is similar with 1080p

Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution

Storage and Playback

- Two SATA interfaces (up to 10 TB capacity per HDD)
- 16-ch synchronous playback
- Smart search for efficient playback
- Supports third-party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Supports line crossing and intrusion VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports up to 4-ch line crossing detection and intrusion detection, and 1-ch sudden scene change detection
- VQD (Video Quality Diagnostics)

Network & Ethernet Access

- HiLookVision & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M/1000M Ethernet network interface
- Output bandwidth limit configurable


Specifications

Model	DVR-224Q-K2	DVR-232Q-K2	
Perimeter Protection ¹	Line Crossing Detection/Intrusion Detection		
	2-ch Enhanced VCA mode on: 4-ch		
Video/Audio input	Video compression		
	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264		
	Analog video input	24-ch	32-ch
		BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	
	HDTVI input	4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 Note: The 3 MP signal input is only available for channel 1/2/3/4.	
	AHD input	4 MP, 1080p25, 1080p30, 720p25, 720p30	
	HDCVI input	1080p25, 1080p30, 720p25, 720p30	
	CVBS input	PAL/NTSC	
	IP video input ²	2-ch (up to 26-ch)	2-ch (up to 34-ch)
		Enhanced IP mode on: 8-ch (up to 32-ch), each up to 4 Mbps	
		Enhanced IP mode on: 8-ch (up to 40-ch), each up to 4 Mbps	
		Up to 4 MP resolution Supports H.265+/H.265/H.264+/H.264 IP cameras	
	Audio compression	G.711u	
	Audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)	
	VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	HDMI output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Encoding resolution	When 1080p Lite mode not enabled: 4 MP lite/3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 4 MP lite/3 MP/1080p lite/720p lite/VGA/WD1/4CIF/CIF	
	Frame rate	Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N)	
		Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N)	
	Video bit rate	32 Kbps to 6 Mbps	
Audio output	1-ch, RCA (Linear, 1 KΩ)		
Audio bit rate	64 Kbps		
Dual stream	Support		
Stream type	Video, Video & Audio		
Synchronous playback	16-ch		
Network management	Remote connections		
	128		
Hard disk	Network protocols		
	TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
External interface	SATA		
	2 SATA interfaces		
General	Capacity		
	Up to 10 TB capacity for each disk		
External interface	Two-way audio input		
	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1 st audio input)		
General	Network interface		
	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface		
General	USB interface		
	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0		
General	Power supply		
	12 VDC, 4.5 A		
	Consumption (without HDD)	≤ 55 W	≤ 65 W
	Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)	
	Working humidity	10% to 90%	
General	Dimensions (W × D × H)		
	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)		
General	Weight (without HDD)		
	≤ 2 kg (4.4 lb)		

Available Models

DVR-224Q-K2, DVR-232Q-K2

Dimensions

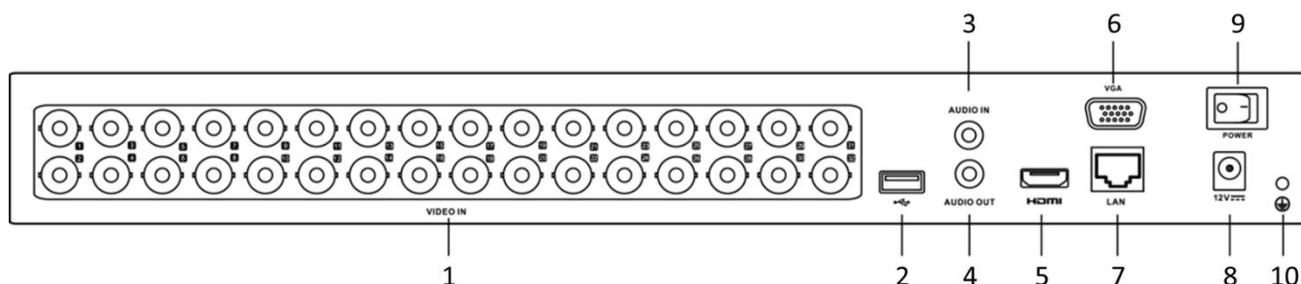

Note:

The rear panel of DVR-224Q-K2 provides 24 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	6	VGA Interface
2	USB Interface	7	LAN Network Interface
3	AUDIO IN, RCA Connector	8	12 VDC Power Input
4	AUDIO OUT, RCA Connector	9	Power Switch
5	HDMI Interface	10	GND

Note:

1: Enabling enhanced VCA mode will maximize the connectable channel number for perimeter protection (line crossing detection and intrusion detection), but disable 2K/4K HDMI output resolution and 4 MP signal input.

2: Enhanced IP mode might be conflicted with smart events (perimeter protection) or other functions, please refer to the user manual for details.