

EV-I5860




Features

- ◆ Varifocal Weatherproof IR Camera
- ◆ SONY Ex-view CCD (ICX673AK/672AK)
- ◆ 72 pcs $\varnothing$ 5mm IR-LED, IR Range 60M
- ◆ OSD/2D-DNR/BLC/MD/Privacy Masking
- ◆ 3-Axis Bracket, Hidden Cable Design
- ◆ Built-in 2.8--12mm Manual Zoom Les



OSD Button in the cable




OSD Menu Control

Specifications

Model Name	EV-I5860
Image Device	1/3" Ex-view CCD
Resolution	700TVL
CCD Sensor	PAL:SONY ICX673AK; NTSC:SONY ICX672AK
DSP Device	SONY Effio-E (CXD4140GG)
Picture Elements	PAL: 976(H)×582(V) ; NTSC:976(H)×494(V)
Min. Illumination	0.01 Lux (F2.0)/ 0 Lux IR On
Lens Furnished	2.8--12mm Manual Zoom Les
TV System	PAL/NTSC
Infrared Luminary	72 pieces $\varnothing$ 5 mm IR-LED
Illuminate Distance	60 M
Wavelength	850 nm
Waterproofing Criterion	IP 66
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000
S/N Ratio	More than 52dB(AGC OFF)
Gamma	0.45
OSD Menu	Yes
Exposure	Auto
2DNR	OFF/ON
D-WDR	ON / OFF
ATR	ON / OFF
Gain Control	Auto / OFF / LOW / MIDDLE / HIGH
White Balance	ATW / User1/User2
Backlight	WDR/BLC/HLC/OFF selectable
Pict Adjust	Mirror/Brightness/Contrast/Sharpness/Hue/Gain

Motion Detect	OFF/ON(Detect sense/ Area Sel)
Peivacy Masking	OFF/ON (4 Zone)
Day&Night	True Day and Night (Auto/ Day / Night / Ext. D&N)
Sync. System	Internal
Video Output	1 Vp-p / 75 Ohms
Power Supply	DC12V±10%
Operation Temperature	-10℃ ~ +50℃ RH95% Max
Dimension	Body : $\varnothing$ 110x105mm With Bracket: 290(L)x110(W)x105(H)
Weight	1800g

Size Chart

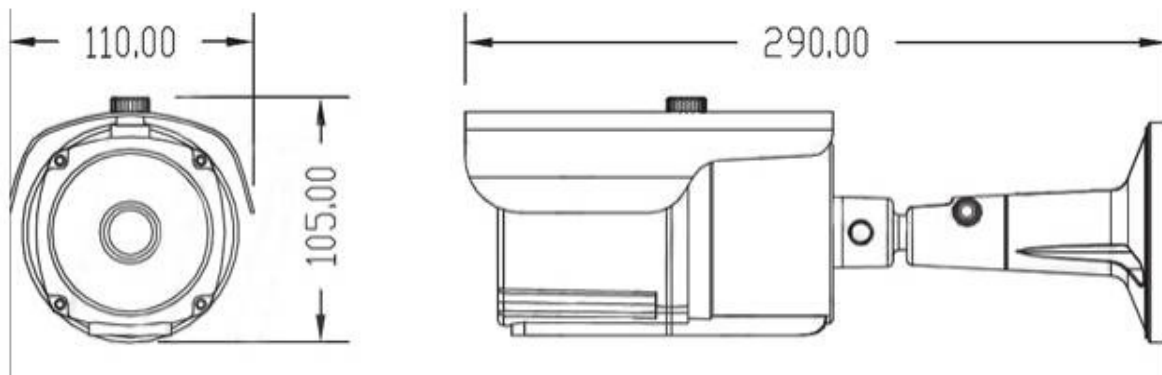

www.evo.co.th