

features

- DIN rail mounting option
- Surface mounting option
- Plug in connectors
- Tri-colour LED status indication
- Address selector switches visible in 2 planes
- LED status visible in 2 planes
- Approved to GEA GEI 1-082 and CEA GEI 1-084

The Morley-IAS loop isolator module is used on the Morley-IAS intelligent fire alarm control panels to protect the system against wire-to-wire short circuits on the analogue addressable loop wiring.

The fault isolator modules should be placed between groups of sensors on the loop wiring to protect the loop if a short circuit fault occurs. If a short circuit fault occurs, the two isolators located either side of the short circuit fault will automatically sense the voltage drop, open their switches and remove the devices from the rest of the loop. If the line voltage then rises above a fixed threshold, indicating that the short circuit fault is removed, then the isolator module will automatically restore the power to the isolated group of devices.

The MI-DISO isolator uses a unique mechanical design allowing each module to be mounted either in a wall box or on a DIN rail. Irrespective of the mounting method chosen, the address switch is both visible and accessible for selection. To help engineers in the maintenance and fault finding process, both the LEDs and the address switches can be viewed without having to remove the cover of the mounting box. The LEDs, being multi colour, provide diagnostic information regarding the status of the isolator.




Charles Avenue, Burgess Hill
West Sussex, RH15 9UF
United Kingdom

Tel: +44 (0) 1444 23 55 56
Fax: +44 (0) 1444 25 44 10
Email: sales@morleyias.co.uk
www.morley-ias.co.uk

A Honeywell Company



MI-DISO Isolator Modules Data Sheet

We reserve the right to amend any design or specification in line with our policy of continuing development and improvement. © Morley-IAS Fire Systems 2003.

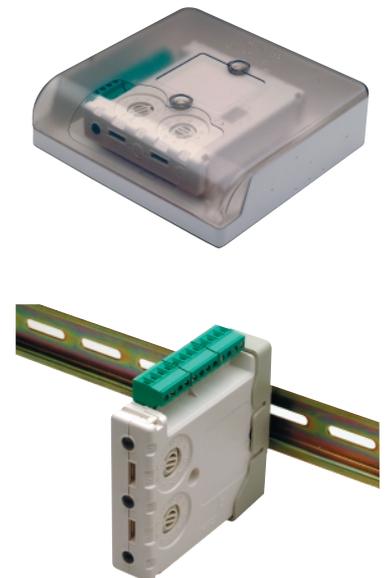

mechanical

Dimensions (mm)	93 x 94 x 23 (H x W x D)
Weight	62g
Operating Temperature	-20 °C to +60 °C
Humidity	0 to 95% maximum non-condensing

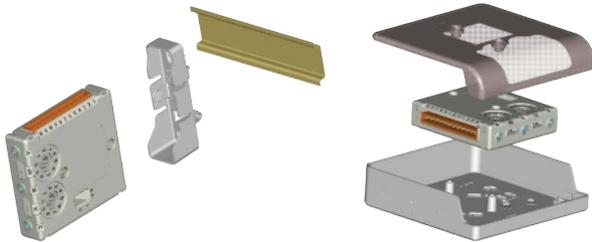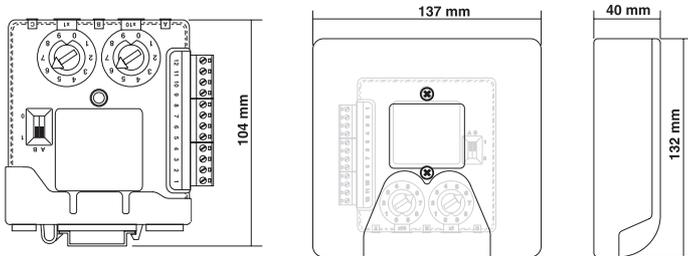

electrical

Operating voltage	15 to 30 Vdc
Standby current	200µA at 24 Vdc maximum
Fault detection delay	100 to 400 mS
On resistance	0.065Ω at 15 Vdc maximum
Terminal Wire	2.5 mm ² maximum


part numbers

MI-DISO Addressable Isolator Module

accessories

M200E-SMB Surface mounting box

M200E-DIN DIN rail mounting clip

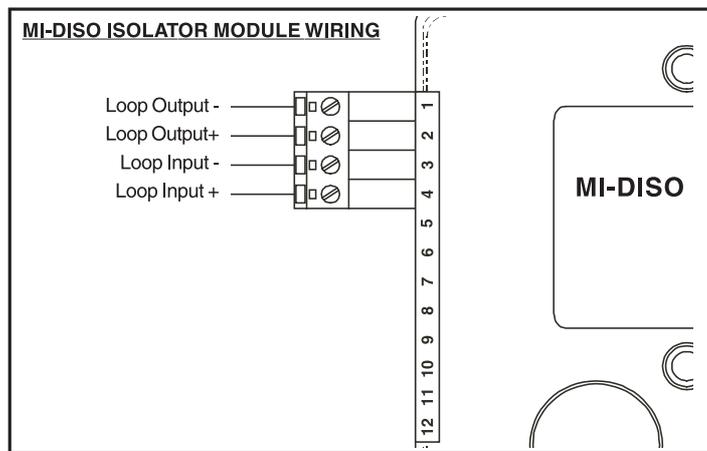

local distributor

Every care has been taken in the preparation of this data sheet but no liability can be accepted for the use of information therein. Design features may be changed or amended without prior notice.

