

Confidentiality: D

Document attribution: Product Management Department

Target users: all

Smart Surveillance Switches

RG-ES205GC-P/209GC-P/
218GC-P/226GC-P

Datasheet

V1.0

Ruijie Networks Co., Ltd.

All rights reserved

R e v i s i o n R e c o r d

Revision date	Version	Revised section	Details	Author

P r e f a c e

This document contains the product pictures, overview, features, technical specifications, and ordering information of the smart surveillance switches for marketing purpose.

Note:

This document can be used directly for product datasheet printing by the Marketing Department.



If you have any enquiries, please contact the document author.

C o n t e n t s

1	Product Photos.....	1
2	Product Overview.....	3
3	Product Features.....	4
4	Technical Specifications.....	6
5	Typical Application.....	8
6	Ordering Information.....	9

1 Product Photos



RG-ES205GC-P



RG-ES209GC-P



RG-ES218GC-P



RG-ES226GC-P

2 Product Overview

With the growing video surveillance industry in China, there are various surveillance equipment manufacturers and brands offering products of different qualities, which has increased the probability of surveillance network malfunction. At present, the technical threshold of most of the engineering companies engaged in surveillance projects is relatively low. When encountering surveillance network failure, they are unable to locate the problem quickly, causing high workload to the operation and maintenance staff. Therefore, in order to solve the pain points of the current video surveillance industry, Ruijie Real-easy Series has launched a series of smart surveillance switches.

Ruijie Reyee smart surveillance switches offer a variety of port options to meet the needs of video surveillance networks of different scales. Ruijie Reyee smart surveillance switches support full-power PoE output to ensure that all cameras can be powered simultaneously when connected to the switch at maximum capacity. In addition, Ruijie Real-easy Series smart surveillance switches provide simple and easy-to-use management features while offering plug and play with default factory configuration, which can quickly locate the surveillance network faults, initiate PoE port restart, perform VLAN configuration, etc. Ruijie Cloud app and Ruijie Cloud platform remote management is also supported, making the operation and maintenance of the surveillance network easier and more convenient, while reducing operation and maintenance costs.

3 Product Features

Plug and Play with zero configuration

Under factory default state, the smart surveillance switches require zero configuration after plugged in. The video surveillance network can be set up quickly after connecting the switch to the cameras and DVR correctly.

Full-power PoE supporting PoE cameras at maximum capacity

Ruijie Reyee smart surveillance switches support full-power PoE output, powering PoE network cameras for all PoE ports simultaneously. Whether it is day or night, the infrared light of the camera is on or off, it can ensure that all PoE network cameras are powered.

Auto PoE power adjustment for safety and energy saving

The PoE port of the smart surveillance switches support 802.3af and 802.3at, providing up to 30W power supply to the connected device. The switches will negotiate with the connected devices to automatically adjust the PoE power, thereby saving energy.

In addition, when the PoE port is connected to a PC, DVR, or other non-PoE device, the switch will automatically identify the device and will not output power to such device to ensure equipment safety.

High compatibility for network cable

The smart surveillance switches not only support standard cat5/5e/6 network cables, but also support power supply and data transmission via network cables of non-standard materials (such as 0.38/0.40/0.45-diameter copper-clad steel/iron), facilitating the construction and cabling.

Fast fault positioning

The smart surveillance switches support network topology display of the entire network and monitoring the network status in real time. When failure occurs for the network camera, the location and cause of failure can be displayed in a timely manner, and the notification can be sent via the Ruijie Cloud app.

On-demand VLAN configuration

In the network of villas/ stores/ offices, the network cameras and wireless APs may be connected to

the same switch. Without network isolation, there may be problems such as camera screen lag and slow wireless speed.

The smart surveillance switches provide convenient and flexible VLAN division, which can automatically divide different VLANs according to the type of equipment connected to the port, so that the surveillance network and data network do not interfere with each other, improving the stability of the entire network.

Ruijie Cloud app/ Ruijie Cloud platform remote management

The smart surveillance switches not only support web interface management, but also support Ruijie Cloud app and Ruijie Cloud platform remote management. Users can view the network status, modify the configuration, and troubleshoot at home. In addition, the PoE port can be restarted remotely to restart the faulty PoE camera.

Multiple deployment methods allowing one-step project management

The smart surveillance switches can obtain the IP address automatically from the gateway and connect to the external network without configuration. Auto-networking for switches is also supported. Users can scan the QR code of any switch in the network using the Ruijie Cloud app to automatically add all switches in the network to the project.

In addition, the smart surveillance switches support networking with Real-easy Series EG / EAP. The switches can be automatically discovered by the Real-easy Series EG / EAP and added to the corresponding project.


4 Technical Specifications

Model	RG-ES205GC-P	RG-ES209GC-P	RG-ES218GC-P	RG-ES226GC-P
Specifications				
Hardware specifications				
Ports	4 10/100/1000 Base-T ports (PoE/PoE+), 1 10/100/1000 Base-T port	8 10/100/1000 Base-T ports (PoE/PoE+), 1 10/100/1000 Base-T port	16 10/100/1000 Base-T ports (PoE/PoE+), 2 SFP Base-X ports	24 10/100/1000 Base-T ports (PoE/PoE+), 2 SFP Base-X ports
Maximum output power per PoE port	30W	30W	30W	30W
Maximum PoE output power per switch	54W	120W	240W	370W
Switching capacity	10Gbps	18Gbps	36Gbps	52Gbps
Packet forwarding rate	7.44Mpps	13.392Mpps	26.784Mpps	38.688Mpps
Surge protection	Common mode: 4KV	Common mode: 4KV	Common mode: 4KV	Common mode: 4KV
Electrostatic discharge	Air discharge: 6KV Contact discharge: 4KV	Air discharge: 6KV Contact discharge: 4KV	Air discharge: 6KV Contact discharge: 4KV	Air discharge: 6KV Contact discharge: 4KV
Power consumption	≤60W	≤130W	≤280W	≤400W
Power supply	External power adapter	External power adapter	Built-in power supply	Built-in power supply
Dimensions (W x D x H)	148*78*26mm	202*108*28mm	300*230*43.6mm	440x289x43.6mm
MTBF	>200K	>200K	>200K	>200K
Operating environment				
Operating temperature	0 to 40°C	0 to 40°C	0 to 40°C	0 to 40°C
Storage temperature	-40~70°C	-40~70°C	-40~70°C	-40~70°C
Operating humidity	10% to 90% RH	10% to 90% RH	10% to 90% RH	10% to 90% RH
Storage humidity	5% to 95% RH	5% to 95% RH	5% to 95% RH	5% to 95% RH
Software features				
MAC capacity	2K	4K	8K	8K
Static MAC address	16	16	16	16
VLAN	Support 802.1Q VLAN			

Port management	Support port status display, port traffic statistics, PoE port output power status, port duplex / negotiation rate configuration, flow control configuration, PoE output on/off
Security	Support broadcast storm suppression, port speed limit, port isolation
L2 features	Support port mirroring, loop protection, cable detection
Management	Support management and configuration through web management interface, Ruijie Cloud platform and Ruijie Cloud app

5 Typical Application

Small and medium-sized surveillance network

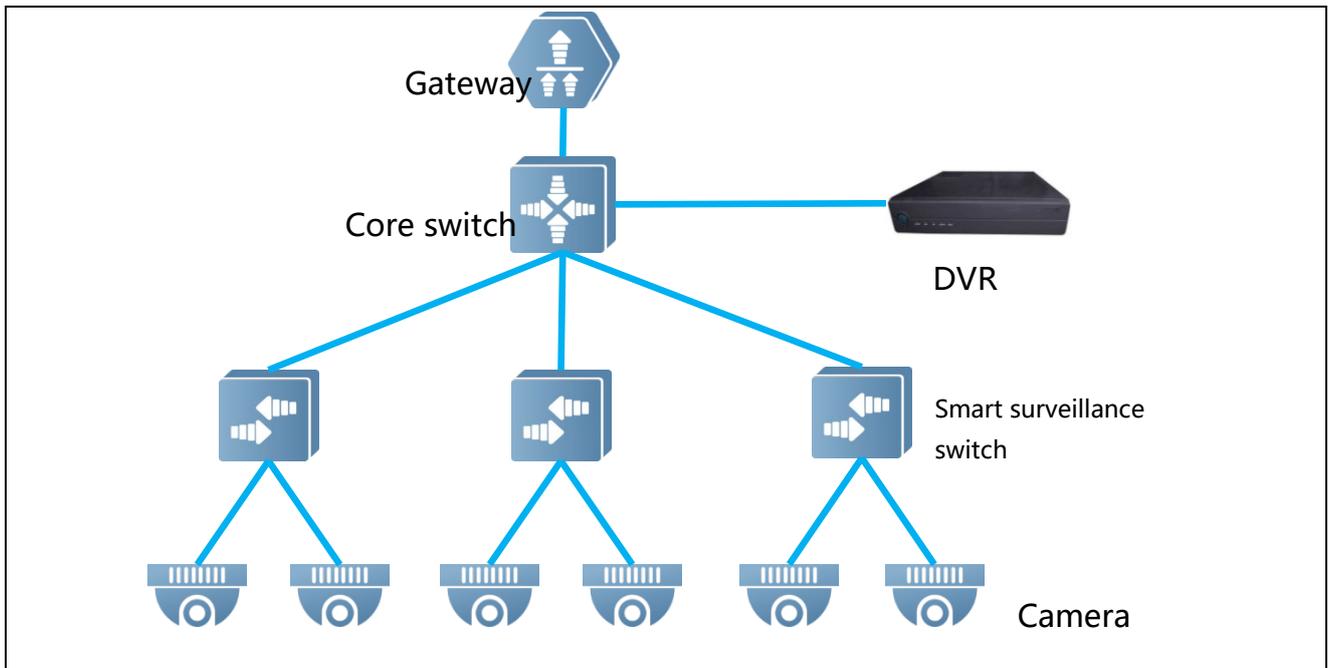

6 Ordering Information

Model	Description
RG-ES205GC-P	4 10/100/1000Base-T ports (PoE/PoE+), 1 10/100/1000Base-T port
RG-ES209GC-P	8 10/100/1000Base-T ports (PoE/PoE+), 1 10/100/1000Base-T port
RG-ES218GC-P	16 10/100/1000Base-T ports (PoE/PoE+), 2 SFP Base-X ports
RG-ES226GC-P	24 10/100/1000Base-T ports (PoE/PoE+), 2 SFP Base-X ports