

FortiGate® 100D Series

Integrated Security for Small and Medium Enterprises



In order to comply with legislation and secure the valuable data traversing networks, small and medium enterprises and remote branch offices need a security solution that integrates multiple attack recognition technologies into a single device. With limited budgets and modest remote resources, these smaller networks desire a cost effective solution that is simple to install, connect and maintain. Just as importantly, networks are ever-expanding and need a solution that leaves them with room to grow over time.

The FortiGate 100D series is an ideal security solution for small and medium enterprises or remote branch offices of larger networks. It combines firewall, IPSec and SSL VPN, application control, intrusion prevention, anti-malware, antispam, P2P security, and web filtering into a single device.

Simple, Powerful, Secure

The FortiGate 100D series installs in minutes, automatically downloading regular updates to protect against the latest viruses, network vulnerabilities, worms, spam and phishing attacks, and malicious websites with no administrator intervention. Leveraging patented FortiASIC acceleration, the FortiGate 100D series offers market-leading performance, with high port density that facilitate network growth and expansion. Onboard storage provides local archiving of data for policy compliance and/or WAN Optimization. The WAN Optimization functionality increases network performance by reducing the amount of communication and data transmitted between applications and servers across a WAN, and/or web caching.

Key Features & Benefits

| | |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Consolidated Security Architecture | Better protection and lower cost of ownership than multiple point security products. |
| Single Pane of Glass Management | Reduces complexity and decreases costs as all security functions can be managed through one console. |
| High Port Density | Up to 42x GE ports facilitate flexible deployment of network segments and promotes network expansion and high availability configurations. |
| Power over Ethernet | Seamless integration of peripheral devices in a secure environment. |

Meeting the Needs of Small and Medium Enterprises and Branch Offices

- High port density delivers maximum flexibility and scalability
- Application control coupled with identity-based policy enforcement provides complete content protection
- Strong authentication options for policy compliance




FortiCare
Worldwide 24x7 Support
support.fortinet.com




FortiGuard
Threat Research & Response
www.fortiguards.com

HARDWARE

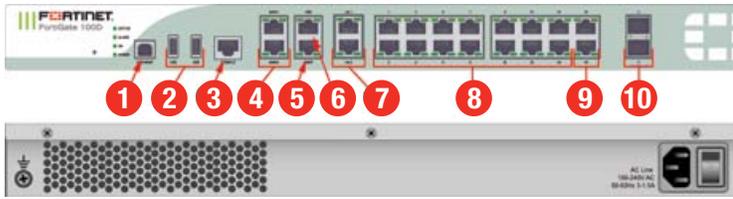


FortiGate 100D

1. USB Management Port
2. 2x USB Ports
3. Console Port
4. 2x GE RJ45 WAN Ports
5. 1x GE RJ45 Management Port
6. 1x GE RJ45 DMZ Port
7. 2x GE RJ45 HA Ports
8. 14x GE RJ45 Switch Ports
9. 2x GE RJ45 Shared Ports
10. 2x GE SFP Shared Ports

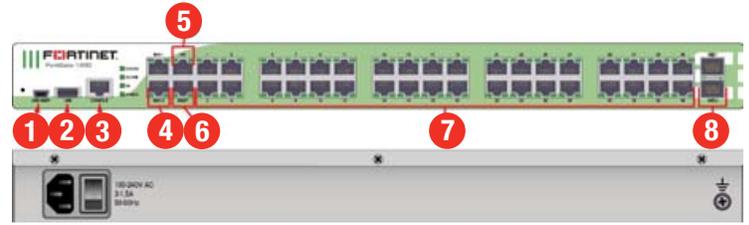


FortiGate 140D

1. USB Management Port
2. USB Port
3. Console Port
4. x GE RJ45 WAN Ports
5. 1x GE RJ45 HA Port
6. 1x GE RJ45 Management Port
7. 36x GE RJ45 Switch Ports
8. 2x GE SFP DMZ Ports

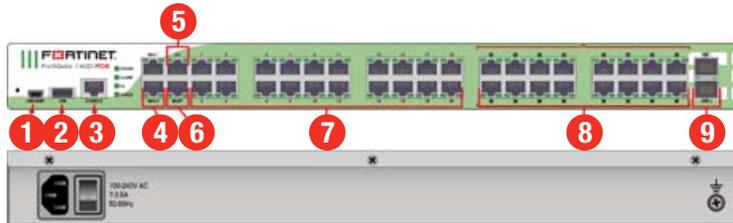

FortiGate 140D-POE

1. USB Management Port
2. USB Port
3. Console Port
4. 2x GE RJ45 WAN Ports
5. 1x GE RJ45 HA Port
6. 1x GE RJ45 Management Port
7. 20x GE RJ45 Switch Ports
8. 16x GE RJ45 PoE Ports
9. 2x GE SFP DMZ Ports

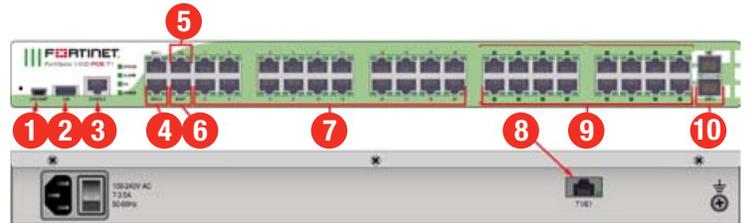

FortiGate 140D-POE-T1

1. USB Management Port
2. USB Port
3. Console Port
4. 2x GE RJ45 WAN Ports
5. 1x GE RJ45 HA Port
6. 1x GE RJ45 Management Port
7. 20x GE RJ45 Switch Ports
8. 1x T1 Port
9. 16x GE RJ45 PoE Ports
10. 2x GE SFP DMZ Ports



Powered by
FortiASIC CP8

- Providing high-speed cryptography for encryption and decryption
- Accelerates signature-based content inspection services such as AV and IPS

Content Processor

The FortiASIC CP8 content processor works outside of the direct flow of traffic, off-loading critical CPU resources.

Install in Minutes with FortiExplorer

The FortiExplorer™ wizard enables you to easily and quickly set up and configure FortiGate platforms with easy-to-follow instructions. The application runs on Windows, Mac OS X desktops and laptops as well as popular mobile devices. Simply connect to the appropriate USB port on the appliance, and be fully protected in minutes.

Power up with PoE Interfaces

The FortiGate 140D-POE and FortiGate 140D-POE-T1 include PoE interfaces that allow you to plug in compatible wireless access points and IP phones out of the box, providing ease of deployment and lower TCO.

HIGHLIGHTS

FortiOS — The World's Most Advanced Security Operating System

- **Feature Select**

Instantly fine-tunes the FortiGate based on desired deployment needs using feature presets. Simplifies user administration and configurations while providing flexibility for different deployment modes.

- **Contextual Visibility**

Presents critical deep insights into historic or real-time network activities with data on threat details, IPs, users, devices, applications and more. Allows administrators to quickly understand threats and stop them.

- **Advanced Security**

Multiple advanced technologies can be coordinated to look for and stop today's blended, targeted or unknown attacks. Efficient packet handling improves performance while lowering latencies and reducing network complexities.

For complete, up-to-date and detailed feature set, please refer to the Administration Handbook and FortiOS Datasheet

Industry Validation

The FortiGate family of physical and virtual appliances has earned more certifications than any other vendor by consistently meeting rigorous third-party standards. Our industry-leading technology provides you with air-tight security which you can safely count on.

More Protection and Better ROI

The FortiGate constantly evolves itself in its mission to provide more value for users. Extended features such as WiFi and L2 switch controller, integrated token server, endpoint control and WAN optimization add more security to organizations without incurring additional cost.

Complete and Real-time Security

Fortinet FortiGuard Subscription Services provide automated, real-time, up-to-date protection against the latest security threats. Our threat research labs are located worldwide, providing 24x7 updates when you most need it.

World-Class Technical Support and Documentation

Fortinet FortiCare support offerings provide comprehensive global support for all Fortinet products and services. You can rest assured your Fortinet security products are performing optimally and protecting your users, applications, and data around the clock.



FortiOS Dashboard — Single Pane of Glass Management

ORDER INFORMATION

| Product | SKU | Description |
|-----------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FortiGate 100D | FG-100D | 20x GE RJ45 ports (including 1x DMZ port, 1x Mgmt port, 2x HA ports, 16x internal switch ports), 2x shared media pairs (including 2x GE RJ45, 2x GE SFP slots), 32 GB onboard storage. Max managed FortiAPs (Total / Tunnel) 64 / 32. |
| FortiGate 140D | FG-140D | 40x GE RJ45 (including 36x switch ports, 2x MGMT/HA ports, 2x WAN ports), 2x GE SFP DMZ slots, 32 GB onboard storage. Max managed FortiAPs (Total / Tunnel) 64 / 32. |
| FortiGate 140D-POE | FG-140D-POE | 40x GE RJ45 (including 16x PoE ports, 20x switch ports, 2x MGMT/HA ports, 2x WAN ports), 2x GE SFP DMZ slots, 32 GB onboard storage. Max managed FortiAPs (Total / Tunnel) 64 / 32. |
| FortiGate 140D-POE-T1 | FG-140D-POE-T1 | 40x GE RJ45 (including 16x PoE ports, 20x switch ports, 2x MGMT/HA ports, 2x WAN ports), 2x GE SFP DMZ slots, 1x T1 port, 32 GB onboard storage (US Only). Max managed FortiAPs (Total / Tunnel) 64 / 32. |

SPECIFICATIONS

| | FORTIGATE 100D | FORTIGATE 140D | FORTIGATE 140D-POE | FORTIGATE 140D-POE-T1 |
|--------------------------------------------------------|----------------------------|--------------------------|-----------------------------------------------------|--------------------------|
| Hardware Specifications | | | | |
| GE RJ45 Ports | 20 | 40 | 24 | 24 |
| GE RJ45 PoE Ports | – | – | 16 | 16 |
| GE SFP or RJ45 Shared Ports | 2 | – | – | – |
| GE SFP Ports | – | 2 | 2 | 2 |
| USB Ports (Client / Server) | 1 / 2 | 1 / 1 | 1 / 1 | 1 / 1 |
| T1 Port | – | – | – | 1 |
| Console Port | – | – | 1 | – |
| Internal Storage | – | – | 32 GB | – |
| Included Transceivers | NA | 0 | 0 | 0 |
| System Performance | | | | |
| Firewall Throughput (1518 / 512 / 64 byte UDP packets) | – | – | 2,500 / 1,000 / 200 Mbps | – |
| Firewall Latency (64 byte UDP packets) | 37 µs | 46 µs | 46 µs | 46 µs |
| Firewall Throughput (Packets Per Second) | – | – | 300 Kpps | – |
| Concurrent Sessions (TCP) | – | – | 3 Million | – |
| New Sessions/Sec (TCP) | – | – | 22,000 | – |
| Firewall Policies | – | – | 10,000 | – |
| IPSec VPN Throughput (512 byte packets) | – | – | 450 Mbps | – |
| Gateway-to-Gateway IPSec VPN Tunnels | – | – | 2,000 | – |
| Client-to-Gateway IPSec VPN Tunnels | – | – | 5,000 | – |
| SSL-VPN Throughput | – | – | 300 Mbps | – |
| Concurrent SSL-VPN Users (Recommended Max) | – | – | 300 | – |
| IPS Throughput | – | – | 950 Mbps | – |
| Antivirus Throughput (Proxy Based / Flow Based) | – | – | 300 / 650 Mbps | – |
| CAPWAP Clear-text Throughput | – | – | 1.50 Gbps | – |
| Virtual Domains (Default / Max) | – | – | 10 / 10 | – |
| Maximum Number of FortiAPs (Total / Tunnel Mode) | – | – | 64 / 32 | – |
| Maximum Number of FortiTokens | – | – | 1,000 | – |
| Maximum Number of Registered FortiClients | – | – | 600 | – |
| High Availability Configurations | – | – | Active / Active, Active / Passive, Clustering | – |
| Dimensions | | | | |
| Height x Width x Length (inches) | 1.75 x 17.01 x 11.73 | 1.75 x 17.01 x 12.28 | 1.75 x 17.01 x 12.28 | 1.75 x 17.01 x 12.28 |
| Height x Width x Length (mm) | 44 x 432 x 298 | 44 x 432 x 312 | 44 x 432 x 312 | 44 x 432 x 312 |
| Form Factor | – | – | Rack Mount, 1 RU | – |
| Weight | 9.5 lbs (4.3 kg) | 11.5 lbs (5.2 kg) | 11.5 lbs (5.2 kg) | 11.5 lbs (5.2 kg) |
| Environment | | | | |
| Power Required | – | – | 100–240 VAC, 50–60 Hz | – |
| Maximum Current | 110 V / 3 A, 220 V / 1.5 A | 110 V / 2 A, 220 V / 1 A | 110 V / 4 A, 220 V / 2 A | 110 V / 4 A, 220 V / 2 A |
| Total Available PoE Power Budget | – | – | 270 W | 270 W |
| Power Consumption (AVG / MAX) | 52.6 W / 63.1 W | 44.8 W / 58.7 W | 193.4 W / 337.1 W | 193.4 W / 337.1 W |
| Heat Dissipation | 215.3 BTU/h | 200.3 BTU/h | 1150.2 BTU/h | 1150.2 BTU/h |
| Operating Temperature | – | – | 32–104°F (0–40°C) | – |
| Storage Temperature | – | – | -31–158°F (-35–70°C) | – |
| Operating Altitude | – | – | Up to 7,400 ft (2,250 m) | – |
| Humidity | – | – | 20–90% non-condensing | – |
| Compliance | | | | |
| – | – | – | FCC Part 15 Class A, C-Tick, VCCI, CE, UL/cUL, CB | – |
| Certifications | | | | |
| – | – | – | ICSA Labs: Firewall, IPSec, IPS, Antivirus, SSL VPN | – |

Note: All performance values are "up to" and vary depending on system configuration. Antivirus performance is measured using 44 Kbyte HTTP files. IPS performance is measured using 1 Mbyte HTTP files. IPSec VPN performance is based on 512 byte UDP packets using AES-256+SHA1. CAPWAP throughput is measured using 512 byte HTTP files. For complete, up-to-date and detailed feature set, please refer to the Administration Handbook and FortiOS Datasheet.



GLOBAL HEADQUARTERS

Fortinet Inc.
899 Kifer Road
Sunnyvale, CA 94086
United States
Tel: +1.408.235.7700
Fax: +1.408.235.7737

EMEA SALES OFFICE

120 rue Albert Caquot
06560, Sophia Antipolis,
France
Tel: +33.4.8987.0510
Fax: +33.4.8987.0501

APAC SALES OFFICE

300 Beach Road #20-01
The Concourse
Singapore 199555
Tel: +65.6513.3730
Fax: +65.6223.6784

LATIN AMERICA SALES OFFICE

Prol. Paseo de la Reforma 115 Int. 702
Col. Lomas de Santa Fe,
C.P. 01219
Del. Alvaro Obregón
México D.F.
Tel: 011-52-(55) 5524-8480

Copyright © 2014 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.